

# TECHNIS

26 ORCHARD DRIVE,  
TONBRIDGE, KENT, TN10 4LG.  
Tel: 01732 352532  
david.smith@technis.org.uk  
www.technis.org.uk

## CERTIFICATE of RELIABILITY and FUNCTIONAL SAFETY

**This is to certify that**

The BExCP3A/B&C-BG/PB/PT and GNExCPB6A/B&C-BG/PB/PT range of Manual Call Points provided by European Safety Systems, Impress House, Mansell Road, London W3 7QH UK. has been assessed and is considered suitable for use in a low demand safety function:

- As an unvoted item (ie hardware fault tolerance of 0) at SIL 2

This claim is in respect of random hardware failures and systematic failures. The assessment was based on the assumptions, proven-in-use data provided, and recommendations given in Technis Report T883 (Issue 1.0). The product was assessed against the failure modes:

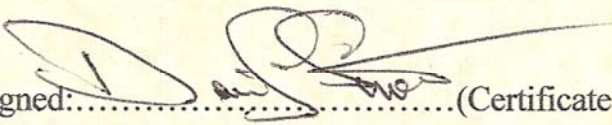
- Failure to close a contact when call point is struck with specified force
- Failure to open a contact when call point is struck with specified force
- Spurious output despite no input

The products include the following:

- BExCP3A/B&C-BG/PB/PT and GNExCPB6A/B&C-BG/PB/PT

The assessment was carried out having regard to the guidance in IEC 61508 [2010] and the related body of guidance in respect of:

- Random Hardware Failures and Systematic Failures [route 2<sub>H</sub>]

Signed:  (Certificate No T883-118) – 27 September 2017)

*Dr David J. Smith BSc, PhD, CEng, FIEE, FIQA, HonFSaRS, MIGasE*

*This certificate does not warrant fitness for any specific applications related purpose and is based on probabilistic and statistical assessment*

**BExCP3A&B-BG/PB/PT**  
**GNExCPB6A&B- BG/PB/PT (resistor or diode EOL)**  
**(Close or Open Contact to Alarm)**

Integrity in respect of failure to close	SIL 2
Total Failure Rate	0.133 pmh
“hazardous” failure rate (revealed)	0 pmh
“hazardous” failure rate (unrevealed)	0.1 pmh
“safe” failure rate (revealed)	0.033 pmh
“safe” failure rate (unrevealed)	0
System Type	A
Hardware Fault Tolerance	0
PFD (hazardous failure)	$1.25 \times 10^{-3}$
Proof Test Interval	Up to 1 year

The validity of this certificate requires that:

The product is used in accordance with any assumptions, limitations or intervals stipulated in the underpinning reliability/integrity report. The product build state continues to conform to the drawings and issues quoted in the underpinning reliability/integrity report. The product is used having regard to the instructions, limitations of use, intervals etc as outlined in the manufacturer’s Safety Manual. The manufacturer maintains a credible level of Functional Safety Management in respect of (for example) design configuration control, procurement, manufacturing and defect analysis. The certificate will not apply to any product variation/modification or to the use of functions not addressed in the original study. It is recommended that the design, defect records and the company FSM procedure are reviewed, at least every 2 years, and should any changes have occurred since the original certification then the manufacture should contact Technis to request re-certification.