




BExCP3B-BG - 48V DC Nominal

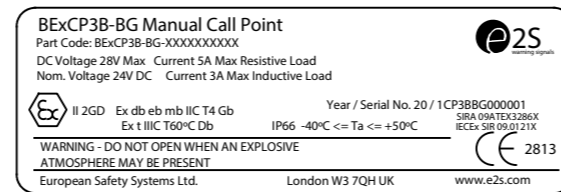

BExCP3B-BG - 24V DC Nominal

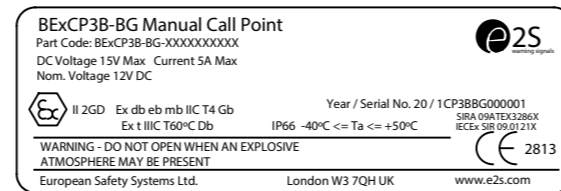

BExCP3B-BG - 12V DC Nominal

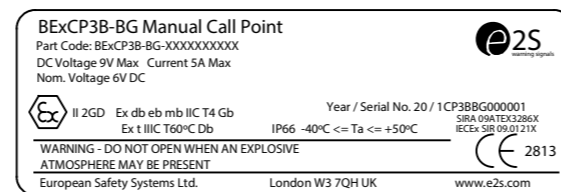


BExCP3B-BG - 6V DC Nominal

Note:

Max Current will vary from that shown on drawing dependant on the type of modules fitted in unit. For specific figures contact E2S sales

Note: Content is for general information only and is subject to change without notification.

THIS DRAWING IS CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE MANUFACTURER AND MUST NOT BE COPIED OR LENT WITHOUT PERMISSION

| | | | |
|--|--|---|--|
| Customer: Project: PO# Reference: Date: | Drawing: D150-09-001 REV: 01 |  ProDetec Measure . Prevent . Protect . Control | ProDetec Pty.Ltd. P. +61 (02) 9620 8700 F. +61 (02) 9620 8755 E. info@prodetec.com.au A. 17/38 Powers Rd, Seven Hills NSW 2147 www.prodetec.com.au |
| | Title: BExCP3-BG Break Glass Manual Call Point BExCP3B-BG Manual Call Point Product Labels | | |