


PRODUCT BROCHURE

DUMO

Continuous Ambient Air Dust Monitor

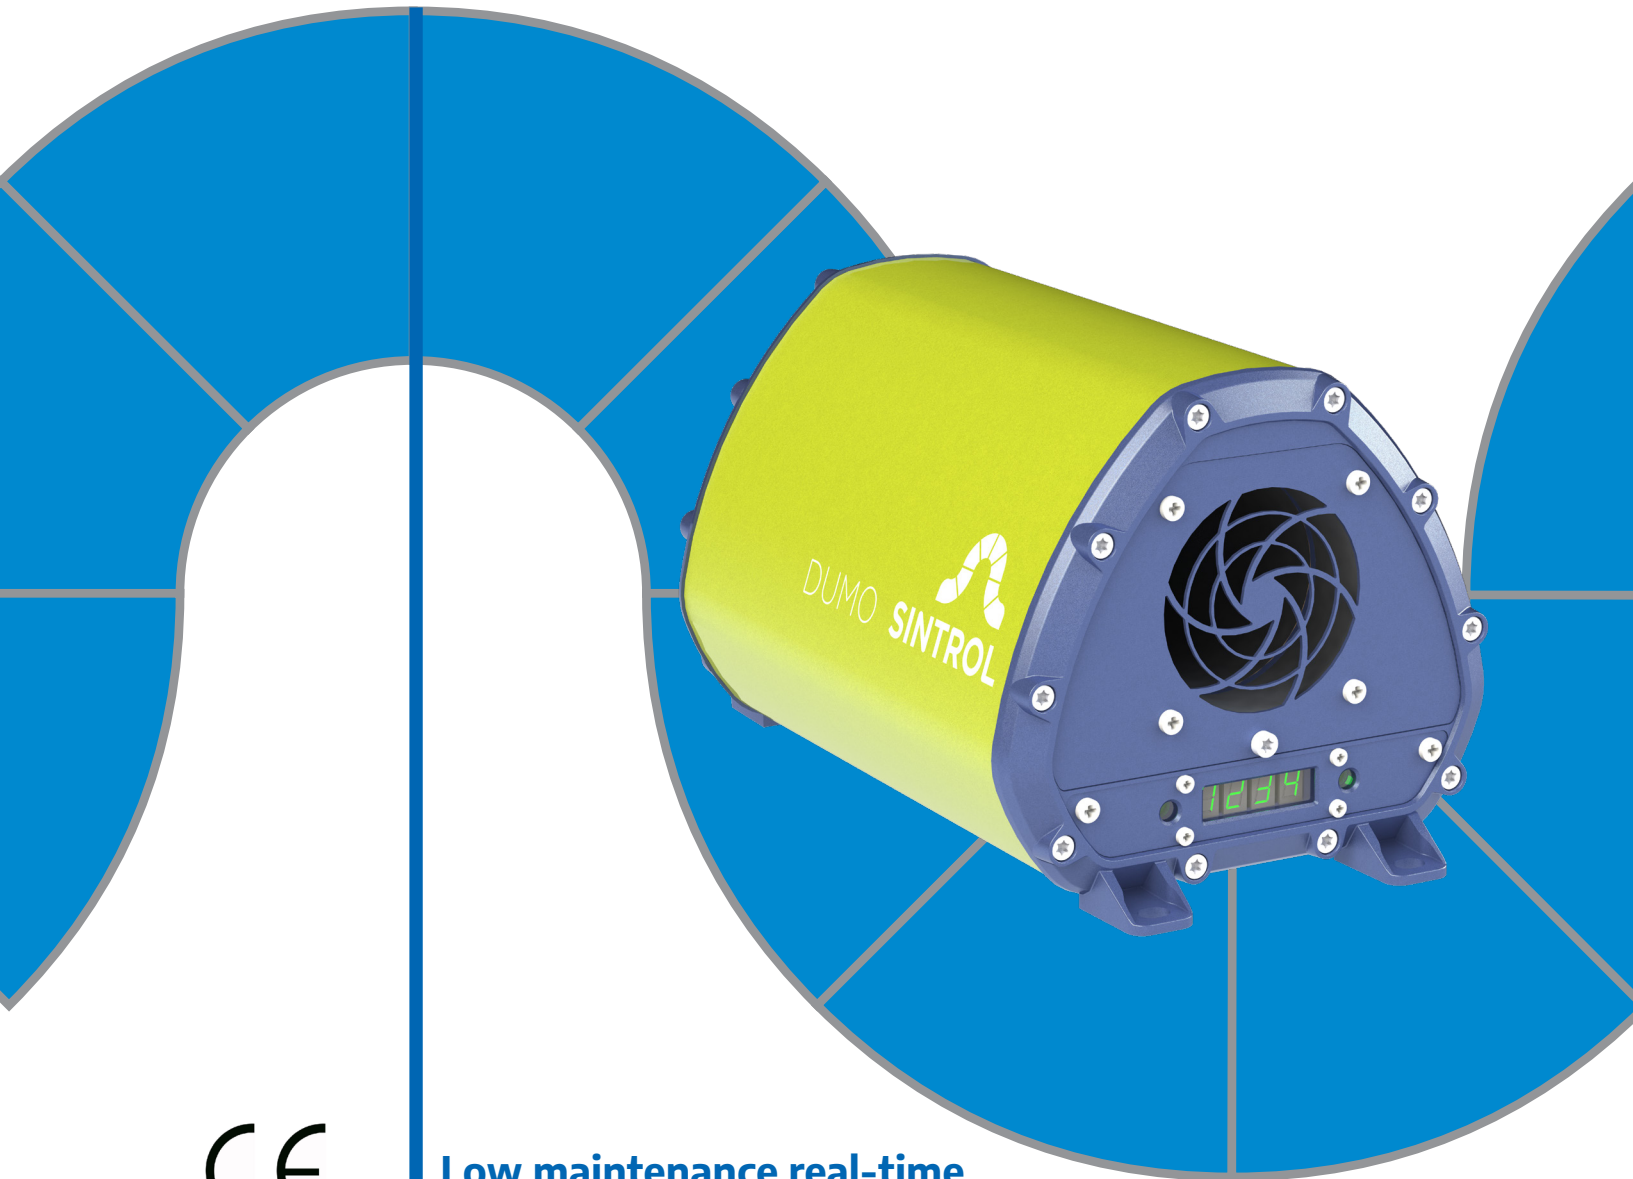

CE

✓ **RoHS₂**
2011/65/EU

Low maintenance real-time monitoring of total suspended particles in industrial environments

Designed to industrial standards with built in failsafe features to increase reliability



SINTROL
Measuring Matters

Benefits:


- Low maintenance and robust
- Easy start-up and commissioning
- Wide measurement range
- Internal self-monitoring for failsafe operation
- Fast response time
- No sample handling required
- Product loss prevention

Because of its high sensitivity to total suspended particles, the Sintrol DUMO is a powerful tool for measuring dust concentration in industrial environments. The field proven state-of-the-art measurement technology is tolerant to sensor contamination making it reliable to a wide variety of dust detection applications. The DUMO utilizes the Sintrol Inductive Electrification technology providing a wide measuring range.

Applications:


- Early detection of dust leaks
- Workplace dust monitoring
- Equipment and worker protection
- Supports good housekeeping practice
- Hazardous location supervision
- Helps mitigate the risk of dust explosion

The robustness of the DUMO makes it a safe choice for dust monitoring in rugged industrial environments. Common industries are flour and sugar mills, mining, wood products, grain handling, chemical, power plants or any bulk and powder handling facility. Some common applications include: health & hygiene, equipment safety, good housekeeping, help mitigate the risk of dust explosions, HazLoc monitoring and the detection of unwanted events.

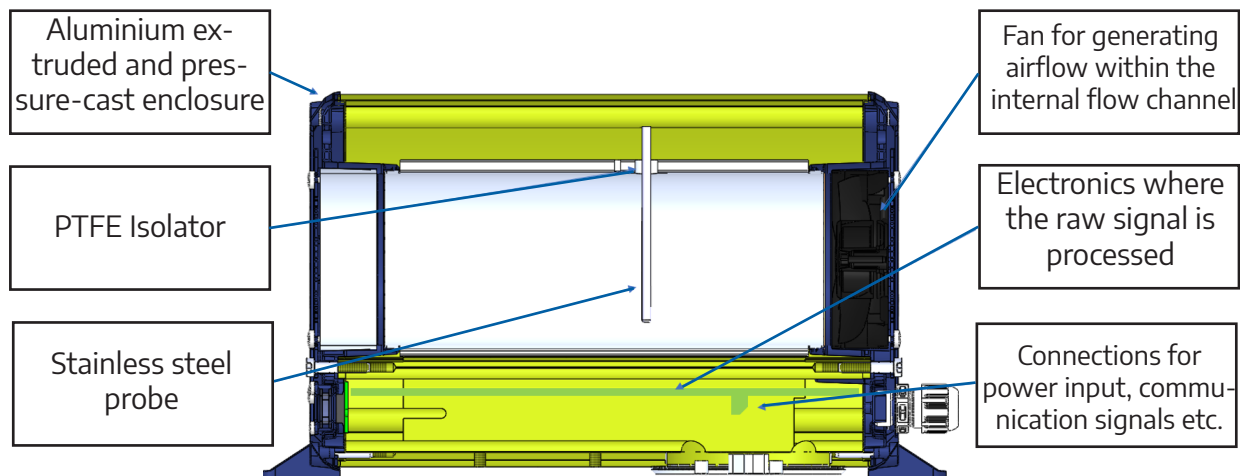

Sintrol's Unique Auto Setup Function

The **Auto Setup** function is a unique Sintrol Dust Monitor feature which allows for a simple, user friendly setup. During the auto setup procedure, which is done in normal process conditions, the dust monitor will automatically adapt to the present conditions and set the measuring range and alarms accordingly.

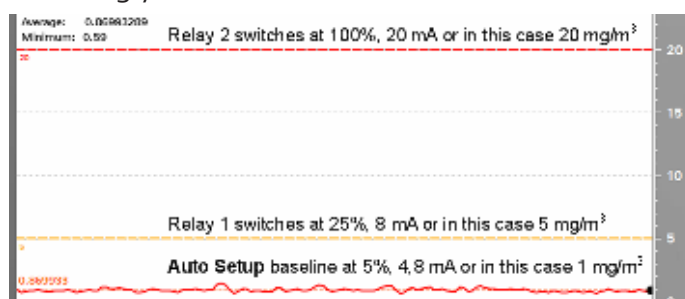

Dust Tool


Dumo can be managed and parameterized with the **DustTool** PC Software. This offers a convenient platform to view the measurement results, to initiate the **Auto Setup** and adjust the parameters of the monitor.



Inductive Electrification Technology

Since 1993, Sintrol has become a globally recognized dust monitor supplier with over 17.000 installations in more than 50 countries. The measuring principle has evolved into a proven standard for dust monitoring needs.

Inductive Electrification Technology

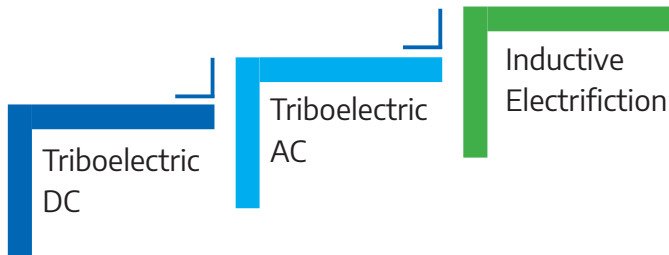


Ambient air is drawn through the measurement chamber producing a steady constant flow.

Particulate matter flowing through the chamber will interact with the sensor rod causing small electrical charge to pass between the particulate and sensor. These small electrical charges provide the signal monitored by the electronics. The generated signal is proportionate to the ambient dust levels.

Sintrol Network with Wireless Radio Frequency (RF) Option

Dumo is able to be networked using the Sintrol RF platform. This reduces cabling costs and eases installation with a fully integrated, easy to use RF connection. Each monitor has a range of up to 1 km and can act as its own repeater within the network. With directional antennas the range can be significantly extended.

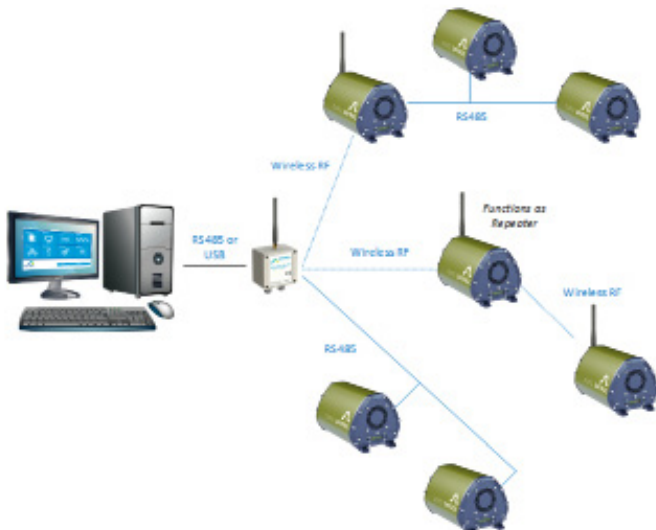


Reliable and user friendly

In reference to multiple international safety codes, Dumo is equipped with the below safety features:

- All instruments are 100% tested, normalized and linearized during production.
- Malfunctions are indicated in the way that relays will relax, the mA output will show 22 mA and LEDs will blink.
- The fan speed is monitored and will trigger an error if the fan is blocked or slowed down.
- A periodic Zero and Span check correction is a standard function of Dumo.
- The solid state relays are normally energized to enable the detection of interruptions in the power supply.
- Voltage supply tolerant to +/- 20% voltage changes.
- During Auto setup the LED will blink green and a countdown is shown on the display.
- In hazardous locations Auto Setup can be triggered without opening the instrument.
- It is possible to perform some very easy bump check after installation:
 - A properly grounded Dumo will show no re-action on the measurement by touching it with your hand.
 - Dumo will react by tearing a piece of paper apart in front of the inlet.
- Dirty or wet sensors may become grounded which distorts the signal. These incidents are detected and an error signal is prompted.
- On board display for direct verification of dust levels or mA output.

The DUMO can be installed anywhere in the production process where the determination of the dust levels is critical or informative. The DUMO makes the task of dust monitoring easier, faster and more reliable than ever before.

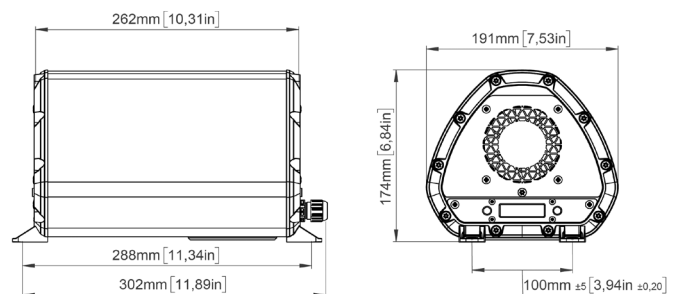

Product Name	DUMO
Measurement objects	Total Suspended Particles (TSP)
Measurement range	Detection Limit 0,01 mg/m ³ , Maximum Range up to several g/m ³
Measurement principle	Inductive Electrification
Protection code	IP65
Power supply	24 VDC + - 20%
Power consumption	Up to 10 W
Output signals	<ul style="list-style-type: none"> Two configurable alarm outputs (100 mA @24 VDC) Isolated 4 - 20 mA output loop, up to 250 Ω loop resistance, Namur NE43 compliant alarms
Communication interface	<ul style="list-style-type: none"> Serial communication RS485, USB, Wireless Radio Frequency (RF) (Option)
Communication protocol	<ul style="list-style-type: none"> Modbus RTU (RS-485) Sintrol network (USB, RF and RS-485)
Alarm settings	Set by auto setup based on average measured dust level: 5 times and 20 times of reference dust level. User adjustable
Signal averaging time	Default at factory: 100 s, Adjustable from 0-6000 s.
Alarm delay time	Default at factory: 30 s, Adjustable from 0-60 000 s.
Alarm hysteresis time	Default at factory: 0 s, Adjustable from 0-25 s.
Ambient Conditions	
Running temperature	-40°C to +60 °C (-40 °F to 140 °F)
Humidity	Max 95 % RH (non-condensing)
Materials and Dimensions	
Weight	4,2 kg (9,3 lbs)
Enclosure / housing	Aluminum enclosure, stainless steel cover plates and probe (AISI 316L).
Dimensions (mm):	288 (L) x 191 (W) x 174 (H)
Wireless Communication (Only for RF models)	
Frequency band	868/915 MHz (license free ISM band), 15 channel
Transmit power	Up to +23 dBm, user adjustable
Receiver sensitivity	-110 dBm
Communication protocol	Proprietary Sintrol Network protocol
Typical range (no line of sight)	915 MHz Version for US Up to 800 m. (2600 ft.) in urban environment 868 MHz fo EU and all others Up to 1000 m. (3200 ft.) in urban environment NOTE: The RF communication range is highly affected

SINTROL GROUP

SINDUMO/091219

OFFICES

FINLAND

Head Office
 Ruosilantie 15
 00390 Helsinki
 Finland
 Tel. +358 9 5617 360
 Fax. +358 9 5617 3680
 info@sintrol.com

WORLWIDE

Head Office
 Ruosilantie 15
 00390 Helsinki
 Finland
 Tel. +358 9 5617 360
 Fax. +358 9 5617 3680
 info@sintrol.com

RUSSIA

Subsidiary
 Dunaysky Str 13,
 b.1 96158,
 St.Petersburg
 Russia
 Tel. + 812 4486083
 spb@sintrol.com

UKRAINE

Subsidiary
 Rybalskaya str.
 2 Ukraine, 01011,
 Kiev city
 Ukraine
 Tel. +380 44 280 3392
 ua@sintrol.com

INDIA

Representative
 Office
 A-2/78,
 Safdarjung
 Enclave 110029
 New Delhi, India
 Tel. +91 9811676061
 india@sintrol.com

CHINA

Representative
 Office
 Room 517
 Mingliuweilai
 Building, No.18
 Jiaomen, Majiapu
 Xi Road, Fengtai
 District, Beijing
 Tel. +86 1 87888681
 Fax. +86 1 87889570
 china@sintrol.com



ProDetec

Measure . Prevent . Protect . Control

ProDetec Pty.Ltd.

P. +61 (02) 9620 8700

F. +61 (02) 9620 8755

E. info@prodetec.com.au

A. 17/38 Powers Rd,
 Seven Hills NSW 2147

www.prodetec.com.au