

FireGuard

The most ingenious smoke detector:
simple – safe – reliable



Applications

- Fire/smoke detection in road and rail tunnels


Advantages

- Rapid, reliable smoke detection without false alarms
- Fog elimination by optional heating elements
- Compact design, no moving parts
- Mounting at the wall, the ceiling, the intermediate ceiling or in the ventilation damper
- Flexible system integration
- LED light source, very low power consumption
- Permanent instrument monitoring in the background
- Simple recalibration with checking rod
- No consumables
- Extremely low maintenance costs

FireGuard

The most genius smoke detector: simple – safe – reliable

Innovations with tangible benefits

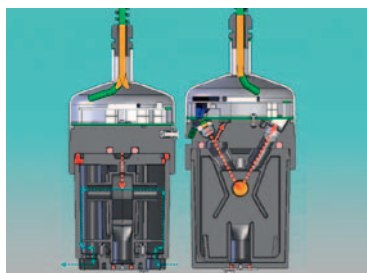

Ingenious design

The sensor uses the available natural air stream in the tunnel. It is very compact and has neither moving parts nor wear parts nor does it need consumables. As a light source, an economical LED is used:


- No risk of failure due to wear.
- Guaranteed operational reliability for years.
- Extremely low operating costs.



Rapid, reliable reaction without false alarms

The sensor detects emerging fires already at their early stages (cold smoke) and thus reacts faster than a fire alarm cable. Any influence caused by fog will be eliminated by optional heating elements. The measurement is not affected by extraneous light, reflexes or other influences as is the case for video detection. Individual setting of parameters allows an optimal object and location related setting of alarms:

- More time for self-rescue.
- No false alarms.
- Reduction of a possible damage to the object and of subsequent costs.

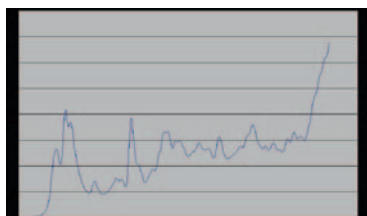

Flexible mounting – Simple system integration

An adjustable bracket allows mounting at the wall, in the arched section or at the ceiling. Special models for installation in the intermediate ceiling or directly in the ventilation dampers are available as are various connection boxes:

- Installation is simple and not dependent on the tunnel profile.
- Fast, flexible system integration.



Minimum maintenance and upkeep

Maintenance is limited to occasional cleaning and the automatic adjustment with a checking rod. Soiling monitoring provides information on the state of the instrument:

- Maintenance is only necessary when required, from experience only about every 5 years.
 - No special tools required.
- The time required per instrument is normally between 15 and 25 minutes at the most.

Technical data

Sensor:

Measuring principle:	120° Scattered light
Wave length:	670 nm
Nominal range:	0 .. 3 E/m
Resolution:	0.001 E/m
Temperature sensor:	-30 °C .. +55 °C
Response time:	5s (at wind speed of 1.5m/s)
Installation:	Wall mounting, under-ceiling mounting, intermediate ceiling mounting, mounting in ventilation damper
Material flow cell:	PC / ABS
Material housing:	Stainless steel 316Ti
Ambient temperature:	-30 °C .. +55 °C
Ambient humidity:	0 .. 100% rel. humidity
Protection:	IP66 (only electronic part)
Operating voltage:	24 VDC
Power input:	4 W (without heater) 13 W (heater, optional)
Weight:	0.9 kg
Dimensions:	approx. Ø 107 x 283 mm
Interface (optional):	Module WLAN IEEE 802.11b/g/n access point with Web server

Connection box SIPORT 2:

Power supply:	85 .. 264 VAC; 47 .. 63 Hz
Power input max.:	25 W
Protection class:	IP66
Material:	Polyester, fibre glass reinforced
Weight:	1.3 kg
Dimensions:	approx. 220 x 120 x 95 mm

Modules for SIPORT 2:

Module Profibus DP:	Interface Profibus DP
Module Modbus RTU:	Interface Modbus RTU
Module PowerRel:	2 x 0/4 .. 20 mA, max. 500 Ω, galvanic separated. 2 x Semiconductor relays max. 30 V, max. 0.12A, Ron max. 25 Ω

Hand-held control unit SICON-C:

Power supply:	24 VDC
Display:	Graphic TFT with touch operation
Weight:	0.6 kg
Dimensions:	130 x 160 x 60 mm
Protection class:	IP65



photometer.com/38d7

Your representative:


ProDetec
Measure . Prevent . Protect . Control

ProDetec Pty.Ltd.

P. +61 (02) 9620 8700
F. +61 (02) 9620 8755
E. info@prodetec.com.au
A. 17/38 Powers Rd,
Seven Hills NSW 2147
www.prodetec.com.au

 **SIGRIST**
PROCESS-PHOTOMETER
SIGRIST-PHOTOMETER AG
Hofurlistrasse 1 · CH-6373 Ennetbürgen
Tel. +41 41 624 54 54 · Fax +41 41 624 54 55
www.photometer.com · info@photometer.com