


PRODUCT BROCHURE

S101 / S103

Dust Detector for Filter Monitoring

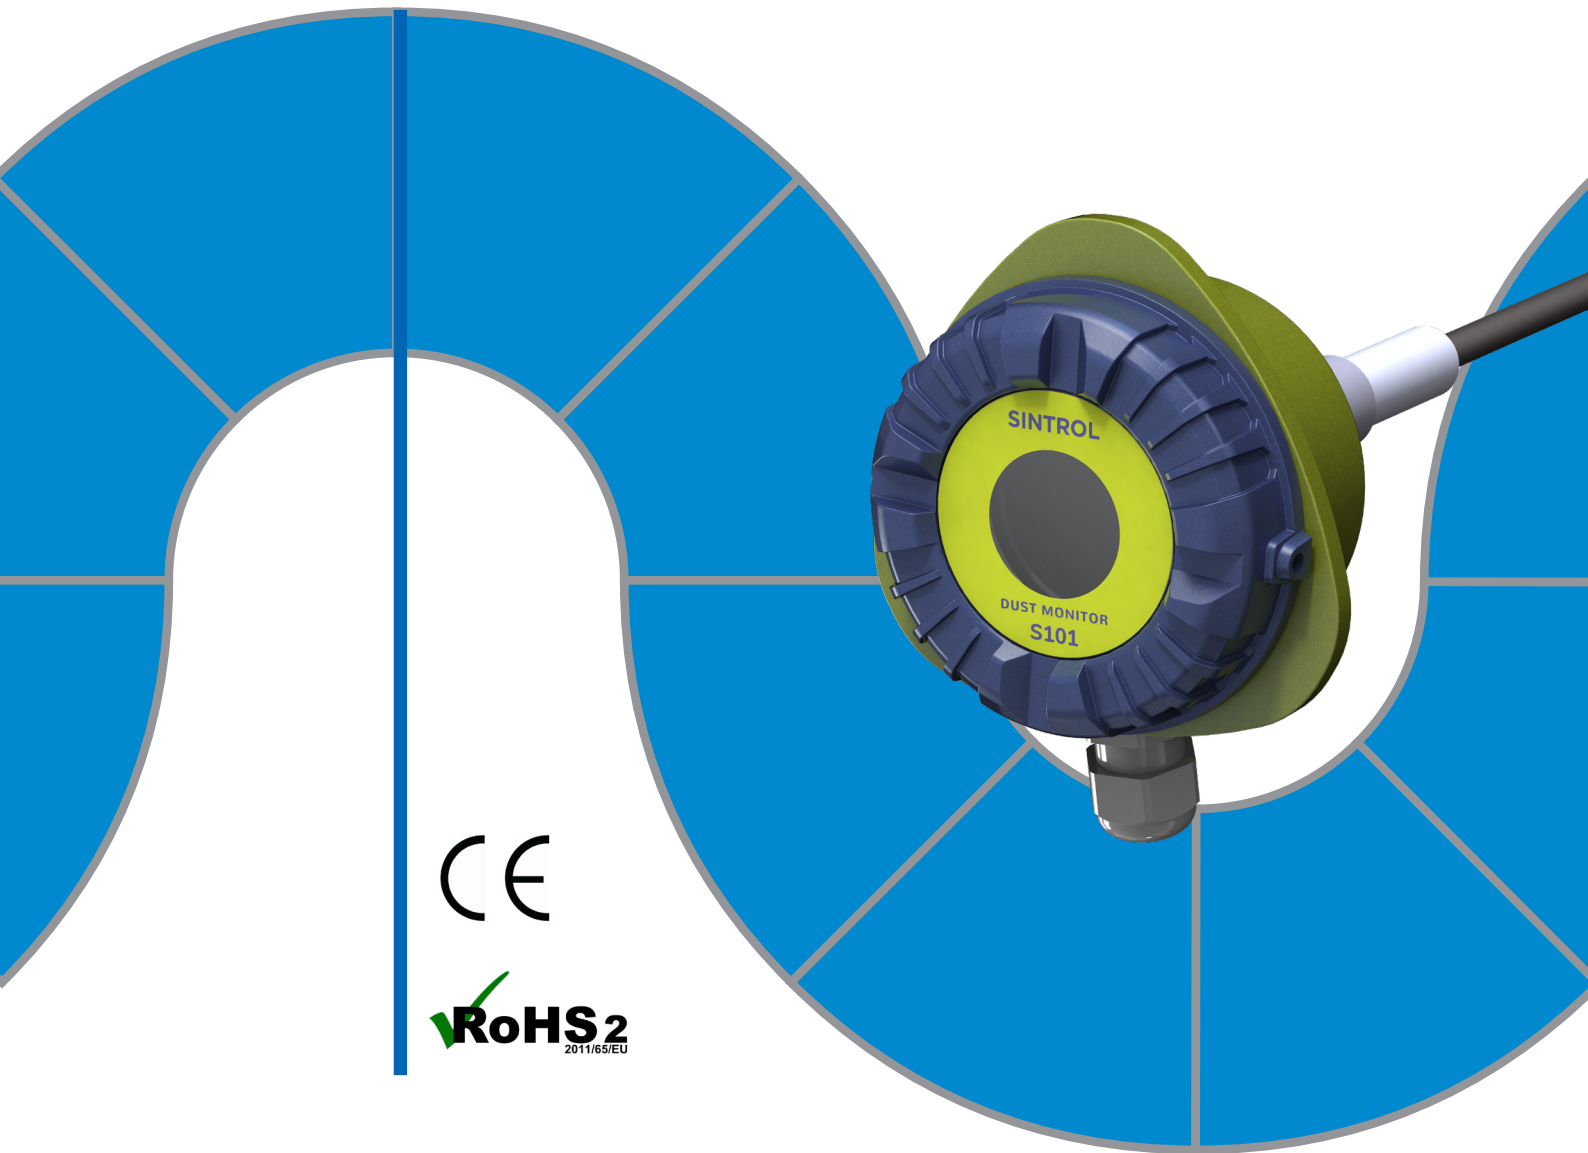


- High performance dust detector
 - Detects any particulates in the air-flow
 - Very fast response to any dust leaks
- S101 comes with two relays to indicate dust alarms
- S103 comes with an active and isolated 4..10 mA output
- Rugged, IP66 rated design for harsh industrial conditions
- Visible Green, Yellow and Red LED to indicate dust levels
- Easy start-up and commissioning due to
 - Self teaching Auto Setup function
 - Selectable FAST, MEDIUM and SLOW response models


ProDetec
Measure . Prevent . Protect . Control

ProDetec Pty.Ltd.
P. +61 (02) 9620 8700
F. +61 (02) 9620 8755
E. info@prodetec.com.au
A. 17/38 Powers Rd,
Seven Hills NSW 2147
www.prodetec.com.au


SINTROL
Measuring Matters

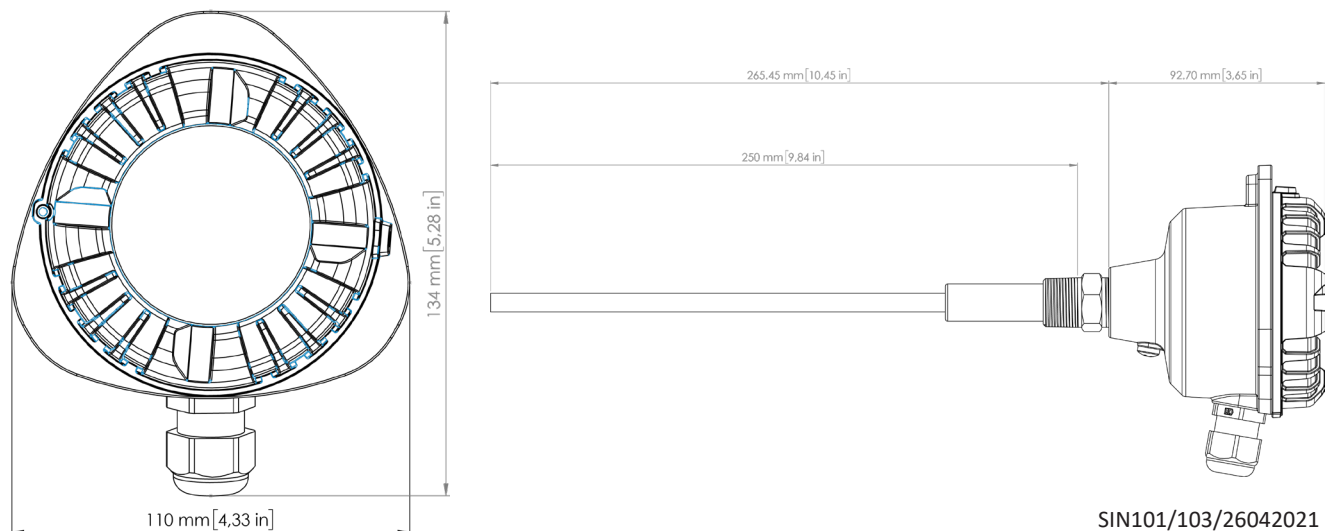

SIN101/103/26042021

Product Name		S101 / S103
Measured objects	Solid particles in gas flow	
Measurement principle	Inductive Electrification	
Measurement range	Detection limit 0,01 mg/m ³ Max. range up to several g/m ³ depending on operating conditions	
Ingress protection	IP66	
Power supply	24 V DC ±10 %	
Power consumption	1 W	
Output signals	S101: 2 × adjustable solid-state relays, max. 30 V DC / 200 mA S103: Active and isolated 4 ... 20 mA output	
Communication interface	RS-485	
Communication protocol	<ul style="list-style-type: none"> • Modbus RTU • Sintrol network 	
Physical characteristics		
Enclosure	Aluminium	
Probe length	250 mm. (9,84 in), can be shortened by the user	
Wetted parts	<ul style="list-style-type: none"> • Probe: Stainless steel (316L) • Insulation: Polyether ether ketone (PEEK) 	
Weight	0,7 kg (1.54 lb)	
Ambient conditions		
Temperature	-40 ... 60 °C (-40 ... 140 °F)	
Humidity	Max. 90 % relative humidity (non-condensing)	
Process conditions		
Temperature	Max. 250 °C (482 °F)	
Pressure	Max. 200 kPa (29 psi)	
Flow speed	Min. 3 m/s (9.84 ft/s)	

SINTROL OFFICES

FINLAND WORLDWIDE

Head Office
Ruosilantie 15
00390
Helsinki
Finland
Tel. +358 9 5617 360
Fax. +358 9 5617 3680
info@sintrol.com

RUSSIA

Subsidiary
Dunaysky Str 13,
b.1 96158,
St.Petersburg
Russia
Tel. + 812 4486083
spb@sintrol.com

UKRAINE

Subsidiary
Rybalskaya
steet 2 Ukraine,
01011, Kiev city
Ukraine
Tel. +380 44 280
3392
ua@sintrol.com

INDIA

Representative
Office
A-2/78,
Safdarjung
Enclave 110029
New Delhi, India
Tel. +91 9811676061
india@sintrol.com

CHINA

Representative
Office
Room 517
Mingliuweilai
Building, No.18
Jiaomen, Majiapu
Xi Road, Fengtai
District, Beijing
Tel. +86 1 87888681
Fax. +86 1 87889570
china@sintrol.com

JAPAN

Representative
Office
Tokoyo
japan@sintrol.com



ISO 9001